

1 DOOR TYPES
A6.02 SCALE: 1/4" = 1'

2 DOOR HEAD DETAILS
A6.02 SCALE: 1/4" = 1'

3 DOOR JAMB DETAILS
A6.02 SCALE: 1/4" = 1'



4 DOOR SILL DETAILS
A6.02 SCALE: 1/4" = 1'

DOOR SCHEDULE NOTES:

- REFER TO FOOD LION SPECIFICATIONS & NATIONAL ACCOUNT REFERENCES FOR DOOR MANUFACTURERS.
- GENERAL CONTRACTOR SHALL VERIFY ALL AUTOMATIC SLIDING DOOR OPENINGS WITH THE MANUFACTURER OR CONTRACTOR.
- ALL PREP TRAFFIC DOORS TO RECEIVE "TEAR-DROP" BUMPERS ON BOTH SIDES OF THE DOOR. BUMPERS SUPPLIED BY DOOR MANUFACTURER.
- NEW TRAFFIC DOORS TO RECEIVE GASKETS AROUND DOOR PERIMETER. GASKETS SUPPLIED BY DOOR MANUFACTURER. (REFER TO SCOPE OF WORK)
- STORE NUMBER TO BE STENCILED (4" HIGH) TO TRUCK DRIVERS (DSD) DOOR IN PAINT COLOR CONTRASTING TO COLOR OF DOOR.
- DOOR SCOPE TO BE PART NO. SOLO1 FROM WARNOK-HERSEY HARDWARE DISTRIBUTOR, (800) 632-1324.
- PROVIDE 1/4" WIRE GLASS IN HALF GLASS DOOR WINDOW, APPLICABLE TO ALL OFFICES.
- ALL EXTERIOR GLAZING @ AUTO DOORS TO BE 1/4" TEMPERED GLASS (COLOR- REFER TO GLAZING SCHEDULE), TO BE PROVIDED BY STOREFRONT CONTRACTOR.
- GENERAL CONTRACTOR SHALL INSTALL KICKPLATES ON BOTH SIDES OF ALL HOLLOW METAL DOORS. (EXCEPTION- EXTERIOR SIDE EXTERIOR DOORS). REPLACE MISSING AND DAMAGED KICKPLATES.
- THE GENERAL CONTRACTOR SHALL SAND, CLEAN, AND REPAINT ALL EXISTING HOLLOW METAL DOORS & FRAMES SCHEDULED FOR REUSE. THE GENERAL CONTRACTOR SHALL FURNISH NEW HOLLOW METAL FRAMES FOR THOSE DOORS TO BE RELOCATED. DOOR HARDWARE TO BE BROUGHT UP TO CURRENT FOOD LION STANDARDS. ALL EXTERNAL DOOR SWEEPS WILL BE REPLACED WITH PEMKO #18100CNB84. CONTRACTOR INSTALL & ORDER NEW DELAY EGRESS STICKERS FROM BA HOFT ONCE DOORS REPAINTED.
- GENERAL CONTRACTOR SHALL INSTALL NEW DOOR SILENCERS ON ALL DOORS (AFTER PAINTING) AND COMMERCIAL GRADE KICK DOWNS ON ALL INTERIOR HOLLOW METAL DOORS. (EXCEPT WORKROOM WITH SAFE).
- THE GENERAL CONTRACTOR SHALL VERIFY CONDITION OF ALL DOORS AND COORDINATE THE REUSE WITH THE FOOD LION CONSTRUCTION MANAGER.
- DOCK DOORS, SEALS, DOCK LEVELER AND EQUIPMENT SHALL BE ORDERED FROM OVERHEAD DOOR AS PER FOOD LION SPECIFICATIONS. REFER TO NATIONAL ACCOUNT REFERENCE INFORMATION, SCOPE OF WORK, & COORDINATE W/ FOOD LION CONSTRUCTION MANAGER.
- TRAFFIC DOORS TO BE ORDERED FROM CHASE DURAS AT HEFOD. REFER TO NATIONAL ACCOUNT INFORMATION.
- HOLLOW METAL DOORS, FRAMES AND HARDWARE SHALL BE ORDERED FROM B.A. HOFT. GENERAL CONTRACTOR MUST ORDER NEW DELAY EGRESS STICKERS FROM B.A. HOFT ONCE THE DOORS ARE REPAINTED. REFER TO NATIONAL ACCOUNT INFORMATION.
- ALL JAMB GUARDS, MISC ALUMINUM, STAINLESS STEEL, ETC BREAK METAL ITEMS SHALL BE FIELD VERIFIED, FABRICATED AND INSTALLED GENERAL CONTRACTOR.
- GENERAL CONTRACTOR SHALL REPLACE MISSING OR DAMAGED WEATHER-STRIPPING, SWEEPS & NEW STYLE CARPET THRESHOLDS ON ALL EXTERIOR DOORS, ROLL-UP DOORS 5-3/8" BRUSH GASKET-MFR/MODEL: #HD15642 BY NATIONAL GUARD.
- G.C. TO ADJUST INTERIOR DOOR CLOSERS SO THAT NO MORE THAN 5 LBS OF FORCE IS REQUIRED TO OPERATE AND SO THAT DOORS GO FROM 90 DEGREE OPEN TO 12 DEGREE OPEN IN 5 SECONDS MIN.
- REVERSE DOOR SWING USING ALUMINUM CONTINUOUS GEARED HINGE MODEL# A571HD BY ARCHITECTURAL BUILDERS HARDWARE MFG. INC. PATCH EXISTING HARDWARE CUT-OUTS IN DOOR FRAME.
- EXTERIOR SIDE OF DOOR/FRAME TO BE PREPPED FOR PAINT AND REPAINTED TO MATCH EXISTING COLOR.


DOOR SCHEDULE ("*" INDICATES EXISTING DOOR)

| NO | | SIZE | LOCATION | RM | HRDW | TYPE | FRAME | HEAD | JAMB | SILL | FRAME COLOR | DOOR FINISH | NOTES AND COMMENTS |
|-------|------------------------|---------------------------------|----------|----------|------|----------|-------|-------|-------|-------|--------------------------|--------------------------|--|
| 100A* | PR 2'-6"x6'-10"x1 3/4" | EXISTING VESTIBULE EXIT | 100 | EXIST | 1 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY | FACTORY | SEE DOOR SCHEDULE NOTES #2,12,17 |
| 100B* | PR 2'-6"x6'-10"x1 3/4" | EXISTING VESTIBULE EXIT | 100 | EXIST | 1 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY | FACTORY | SEE DOOR SCHEDULE NOTES #2,12,17 |
| 100C* | PR 2'-6"x6'-10"x1 3/4" | EXISTING VESTIBULE | 100 | EXIST | 1 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY | FACTORY | SEE DOOR SCHEDULE NOTES #2,12,17 |
| 100D* | PR 2'-6"x6'-10"x1 3/4" | EXISTING VESTIBULE | 100 | EXIST | 1 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY | FACTORY | SEE DOOR SCHEDULE NOTES #2,12,17 |
| 101* | 3'-0"x7'-0"x1 3/4" | REMODELED SALES AREA EXIT | 101 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) INT/EXT MATCH ADJ | P-3(B) INT/EXT MATCH ADJ | SEE DOOR SCHEDULE NOTES #9,10,12,17,18 |
| 102 | 3'-0"x7'-0"x1 3/4" | NEW WORK ROOM | 102 | HW-12 | 7 | NEW ALUM | H-1 | J-1 | - | - | P-3(B) | P-3(B) | SEE DOOR SCHEDULE NOTES #9,10,11,15,18 |
| 103* | 3'-0"x6'-8"x1 3/4" | EXISTING RISER ROOM | 103 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) | P-3(B) | SEE DOOR SCHEDULE NOTES #9,10 |
| 104 | 3'-0"x7'-0"x1 3/4" | EXISTING CORRIDOR | 104 | HW-13 | 11 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY | FACTORY | SEE DOOR SCHEDULE NOTES #3,4,12,14,16 |
| 105* | 3'-0"x6'-8"x1 3/4" | EXISTING MEN'S #1 RESTROOM | 105 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) CORR | P-3(B) CORR | SEE DOOR SCHEDULE NOTES #10,12,18 |
| 106* | 3'-0"x6'-8"x1 3/4" | EXISTING WOMEN'S #1 RESTROOM | 106 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) CORR | P-3(B) CORR | SEE DOOR SCHEDULE NOTES #10,12,18 |
| 106A* | 3'-0"x6'-8"x1 3/4" | EXISTING UNISEX RESTROOM | 106A | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) | P-3(B) | SEE DOOR SCHEDULE NOTES #10,12,18 |
| 107* | PR 3'-0"x8'-0"x1 3/4" | EXISTING RECEIVING ROOM | 107 | EXIST | 12 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) SALES | FACTORY | SEE DOOR SCHEDULE NOTES #9,10,12,17 |
| 107A* | 3'-0"x7'-0"x1 3/4" | EXISTING RECEIVING ROOM EXIT | 107 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY/EXT MATCH ADJ | FACTORY | SEE DOOR SCHEDULE NOTES #9,10,12,17 |
| 107B* | 6'-0"x8'-0"x1 3/4" | EXISTING RECEIVING ROOM EXIT | 107 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY/EXT MATCH ADJ | FACTORY | SEE DOOR SCHEDULE NOTES #9,10,12,17 |
| 107C | 8'-0"x8'-0" | EXISTING RECEIVING ROOM | 107 | HW-07 | 9 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY | FACTORY | SEE DOOR SCHEDULE NOTES #1,13,17,20 |
| 107D | 8'-0"x8'-0" | EXISTING RECEIVING ROOM | 107 | HW-07 | 9 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY | FACTORY | SEE DOOR SCHEDULE NOTES #1,13,17,20 |
| 107E* | 3'-0"x7'-0"x1 3/4" | EXISTING RECEIVING ROOM EXIT | 107 | EXIST | 12 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY/EXT MATCH ADJ | FACTORY | SEE DOOR SCHEDULE NOTES #9,10,12,17 |
| 107F | PR 3'-0"x8'-0"x1 3/4" | EXISTING RECEIVING ROOM | 107 | HW-14 | 12 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) SALES | FACTORY | SEE DOOR SCHEDULE NOTES #1,3,4,14,16 |
| 108 | 3'-0"x7'-0"x1 3/4" | NEW LOUNGE | 108 | HW-10 | 8 | NEW ALUM | H-1 | J-1 | S-2 | - | P-3(B) | P-3(B) | SEE DOOR SCHEDULE NOTES #9,10,11,12,18 |
| 109 | 3'-0"x7'-0"x1 3/4" | NEW DMO/ASSO TRAINING ROOM | 109 | HW-5 | 8 | NEW ALUM | H-1 | J-1 | - | - | P-3(B) | P-3(B) | SEE DOOR SCHEDULE NOTES #9,10,11,15,18 |
| 110* | 3'-0"x6'-8"x1 3/4" | EXISTING MECHANICAL ROOM | 110 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY | FACTORY | SEE DOOR SCHEDULE NOTES #17 |
| 110A* | 3'-0"x7'-0"x1 3/4" | EXISTING MECHANICAL ROOM EXIT | 110 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY/EXT MATCH ADJ | FACTORY/EXT MATCH ADJ | SEE DOOR SCHEDULE NOTES #17 |
| 110B* | 8'-0"x8'-0"x1 3/4" | EXISTING MECHANICAL ROOM EXIT | 110 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY/EXT MATCH ADJ | FACTORY/EXT MATCH ADJ | SEE DOOR SCHEDULE NOTES #17 |
| 112* | PR 3'-0"x7'-0"x1 3/4" | EXISTING MEAT PREP | 112 | EXIST | 12 | EXIST | EXIST | EXIST | EXIST | EXIST | - | - | SEE DOOR SCHEDULE NOTES #3,12 |
| 113 | PR 2'-0"x7'-0"x1 3/4" | EXISTING SEAFOOD PERP | 113 | HW-14 | 12 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) SALES/EXIST PREP | FACTORY | SEE DOOR SCHEDULE NOTES #3,4,12,14,16 |
| 114* | 3'-0"x7'-0"x1 3/4" | RELOCATED STORE MANAGERS OFFICE | 114 | EXIST | 8 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) | P-3(B) | SEE DOOR SCHEDULE NOTES #7,9,10,11,12,18 -NEW WINDOW KIT |
| 115* | PR 2'-6"x7'-0"x1 3/4" | EXISTING PRODUCE PREP | 115 | EXIST | 14 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY ALUMINUM | FACTORY | SEE DOOR SCHEDULE NOTES #3,16,18 |
| 116A | 3'-0"x7'-0"x1 3/4" | EXISTING DELI/ BAKERY PREP | 116 | HW-13 | 11 | EXIST | EXIST | EXIST | EXIST | EXIST | FACTORY | FACTORY | SEE DOOR SCHEDULE NOTES #3,4,12,14,16 |
| 116B | 3'-0"x3'-6"x1 3/4" | EXISTING DELI/ BAKERY PREP | 116 | NEW ALUM | 17 | - | - | - | - | - | - | - | SEE DOOR SCHEDULE NOTE #1- FLOOR MOUNTED |
| 116C* | 3'-0"x6'-8"x1 3/4" | EXISTING DELI/ BAKERY STORAGE | 116C | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) | P-3(B) | SEE DOOR SCHEDULE NOTES #9,10,11,18 |
| 117* | 3'-0"x6'-8"x1 3/4" | EXISTING DELI/ BAKERY CLOSET | 117 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) | P-3(B) | SEE DOOR SCHEDULE NOTES #9,10,11,18 |
| 118* | 3'-0"x6'-8"x1 3/4" | EXISTING BROOM CLOSET | 118 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) | P-3(B) | SEE DOOR SCHEDULE NOTES #9,10 |
| 119* | 3'-0"x6'-8"x1 3/4" | EXISTING STORAGE CLOSET | 119 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | P-3(B) | P-3(B) | SEE DOOR SCHEDULE NOTES #9,10 |
| 123* | 3'-0"x6'-8"x1 3/4" | EXISTING MEN'S #2 RESTROOM | 123 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | - | - | SEE DOOR SCHEDULE NOTES |
| 124* | 3'-0"x6'-8"x1 3/4" | EXISTING WOMEN'S #2 RESTROOM | 124 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | - | - | SEE DOOR SCHEDULE NOTES |
| 125* | 3'-0"x6'-8"x1 3/4" | ABANDONED LOUNGE | 125 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | - | - | SEE DOOR SCHEDULE NOTES |
| 126* | 3'-0"x6'-8"x1 3/4" | ABANDONED DEPT. MGRS. OFFICE | 126 | EXIST | 2 | EXIST | EXIST | EXIST | EXIST | EXIST | - | - | SEE DOOR SCHEDULE NOTES |

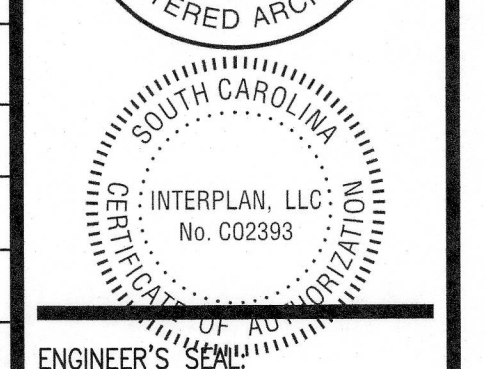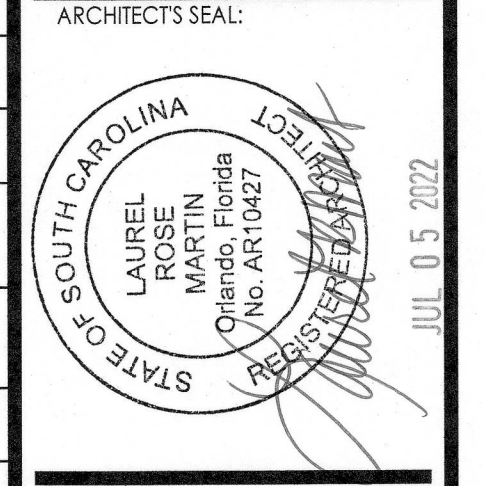

ENGINEER'S SEAL

| REVISIONS | NO | DATE | REMARKS |
|-----------|----|------|---------|
| | | | |

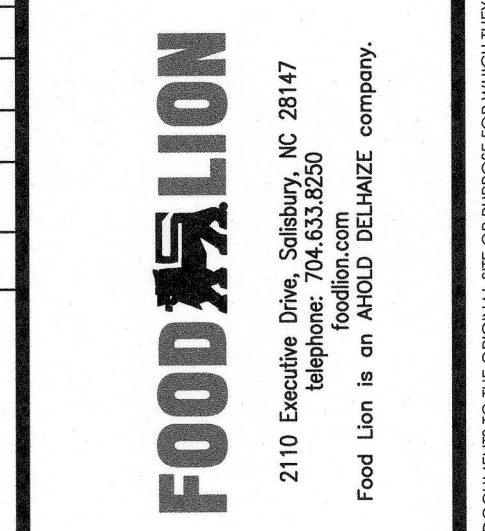

FOOD LION
REMODEL
STORE #2839
860 PARRIS ISLAND GTWY
BEAUFORT, SC 29906

PROJECT NO: 2021.1218
DATE: 7/5/22

25 OF 54
A6.02

WINDOW AND DOOR FINISH
SCHEDULES
CHECKED: DNC DRAWN: EC