

REVISIONS	REMARKS
NO	DATE

**FOOD LION**  
2110 Executive Drive, Salisbury, NC 28147  
Telephone: 704.633.8250  
Food Lion is an A HOLD DELIZIANE company.

**FOOD LION**  
**REMODEL**  
**STORE #2839**  
860 PARRIS ISLAND GTWY  
BEAUFORT, SC 29906

PROJECT NO: 2021.1218  
DATE: 7/5/22

41 OF 54  
**E0.01**  
ELECTRICAL DEMOLITION  
PLAN

CHECKED: SN DRAWN: MM

**ELECTRICAL DEMOLITION GENERAL NOTES**

- ALL ACCESSIBLE ITEMS OF ELECTRICAL EQUIPMENT CONDUITS, WIRING, LIGHTS, RECEPTACLES, ETC. AFFECTED BY THE RENOVATION WORK AND NOT REQUIRED FOR COMPLETED WORK SHALL BE CAREFULLY REMOVED. DAMAGED WALLS, FLOORS, CEILINGS, ETC. SHALL BE PATCHED AND FINISHED TO MATCH THE EXISTING ADJACENT SURFACES. REMOVED ITEMS SHALL BE PROPERLY DISPOSED OF OFF SITE AND NOT RE-USED EXCEPT AS NOTED. TURN OVER ALL EXISTING EQUIPMENT DESIRED BY BUILDING OWNER. ITEMS TO BE RE-USED SHALL BE CAREFULLY REMOVED AND STORED IN A PROTECTED AREA.
- REMOVE EXISTING UNUSED CIRCUITS IN PANELS NOT REQUIRED FOR COMPLETED WORK. UTILIZE EXISTING BREAKERS FOR NEW WORK SHOWN. PROVIDE NEW BREAKERS AS REQUIRED TO SERVE NEW CIRCUITS. LABEL ALL BREAKERS. LABEL ALL BREAKERS NOT USED AS SPARE.
- RECONNECT CIRCUITS AS REQUIRED TO MAINTAIN CONTINUITY TO EXISTING DEVICES AND EQUIPMENT NOTED TO REMAIN AS WELL AS ADJACENT AREAS WHICH ARE NOT IN CONTRACT.
- REMOVE UNUSED CONDUIT AND WIRE BACK TO SOURCE.
- ALL WIRING SHALL BE DONE IN STRICT ACCORDANCE WITH N.E.C. STANDARDS AND WITH FOOD LION STANDARDS. ALL WORK SHALL BE OF FIRST QUALITY. NO HAZARDOUS WORK WILL BE ACCEPTED. ELECTRICAL CONTRACTOR IS TO MAKE SURE THAT NO MC OR FLEX CABLES ARE USED UNLESS OTHERWISE NOTED. MC OR FLEX CABLES CAN ONLY BE USED IN SHORT RUNS FOR LIGHTING FEEDS. EMT MUST BE USED TO CONNECT PANEL TO JUNCTION BOX AND HAVE COMPRESSION TYPE FITTINGS. SEE SPECIFICATIONS FOR STANDARD PRACTICES.
- DO NOT DISRUPT THE PULL STATIONS, SAFE, OR ANY COMPONENT OF THE FIRE OR SECURITY SYSTEM WITHOUT FIRST CONTACTING FOOD LION PHYSICAL SECURITY (ARON ASHLEY) AT (704) 633-8250 ext. 3128.
- THE ELECTRICAL CONTRACTOR SHALL REVIEW THE HAZARDOUS MATERIAL REPORT, IF APPLICABLE, AND COORDINATE ALL HAZARDOUS MATERIAL REMOVAL WITH THE FOOD LION CONSTRUCTION SUPERVISOR.
- THE ELECTRICAL CONTRACTOR SHALL PHOTOGRAPH OR VIDEOTAPE EXISTING CONDITIONS IN AND AROUND THE STORE PRIOR TO BEGINNING CONSTRUCTION. PARTICULAR ATTENTION SHOULD BE DIRECTED TO THE CEILING, ALL LIGHTING AND PANELS.
- THE ELECTRICAL CONTRACTOR SHALL COORDINATE REMOVAL/RELOCATION OF LOTTERY EQUIPMENT WITH THE GENERAL CONTRACTOR AND THE FOOD LION CONSTRUCTION SUPERVISOR.
- ANY WORK IN REST ROOMS TO BE SCHEDULED TO ALLOW FOR AT LEAST ONE TO REMAIN OPEN AT ALL TIMES. COORDINATE WITH FOOD LION CONSTRUCTION SUPERVISOR. PROPER SIGNAGE MUST BE INSTALLED WITH UNLCK RESTROOMS. USE SLIDE LOCK. PROVIDED BY FOOD LION.

**ELECTRICAL DEMOLITION KEY NOTES**


- EMERGENCY/EXIT/EXTERIOR/GOOSNECK LIGHTING FIXTURE/CEILING GRID TO BE REPLACED. DISCONNECT FIXTURE. MAINTAIN SAME CIRCUITRY. PROVIDE CIRCUITRY PROVISIONS NECESSARY TO MAINTAIN DOWNSTREAM LOADS.
- REMOVE EXISTING UPLIGHT LIGHTING FIXTURES. PROVIDE CIRCUITRY PROVISIONS NECESSARY TO MAINTAIN DOWNSTREAM LOADS.
- LIGHTING FIXTURE TO BE RELOCATED. DISCONNECT LIGHT FIXTURE, REMOVE WIRE AND CONDUIT BACK TO NEAREST J-BOX AND PROVIDE CIRCUITRY PROVISIONS NECESSARY TO MAINTAIN DOWNSTREAM LOADS. ANY LIGHT FIXTURES TO BE REUSED ARE TO BE REMOVED AND STORED IN SUCH A MANNER THAT RENDERS THEM REUSABLE. GC SHALL STORE FIXTURES IN A SECURED TRAILER.
- LIGHT FIXTURE TO BE REMOVED. DISCONNECT FIXTURE, REMOVE WIRE AND CONDUIT BACK TO NEAREST J-BOX, AND PROVIDE CIRCUITRY PROVISIONS NECESSARY TO MAINTAIN DOWNSTREAM LOADS. SAVE FIXTURES FOR FUTURE USE.
- TRELLIS AND ASSOCIATED TRACK LIGHTING TO BE REMOVED COMPLETELY. REMOVE CONDUIT AND WIRE BACK TO SOURCE AND LABEL NON-REUSED BREAKERS AS "SPARE".
- STORE FRONT SIGN TO BE REPLACED. DISCONNECT AS REQUIRED. CIRCUITRY TO REMAIN FOR RECONNECTION. NEW LED SIGN REQUIRES ONE JUNCTION BOX. TERMINATE THE REST FOR FUTURE USE. REFER TO E1.01 FOR ADDITIONAL INFORMATION.
- EQUIPMENT TO BE REMOVED. ELECTRICAL CONTRACTOR SHALL DISCONNECT AS REQUIRED. REMOVE DEVICES, WIRE, CONDUITS, ETC. AND LABEL BREAKERS AS "SPARE" FOR NON-REUSED CIRCUITS.
- EQUIPMENT TO BE RELOCATED. ELECTRICAL CONTRACTOR SHALL DISCONNECT AS REQUIRED. REMOVE DEVICES, WIRE, CONDUITS, ETC. AND EXTEND CIRCUITRY AND RECONNECT AS REQUIRED TO NEW LOCATION. REFER TO E1.02 FOR ADDITIONAL INFORMATION.
- RECEPTACLES, COMMUNICATIONS, DATA, AND JUNCTION BOXES BELOW 48" AFF TO BE RELOCATED TO 48" AFF BEHIND NEW CABINET TO BE INSTALLED IN WORK ROOM.
- PROPANE EXCHANGE TO BE RELOCATED. ELECTRICAL CONTRACTOR SHALL FIELD VERIFY THAT ALL ELECTRICAL CONNECTIONS ARE CAPPED OFF WITHIN 5' OF THE FINAL LOCATION OF THE RELOCATED PROPANE EXCHANGES. ELECTRICAL CONTRACTOR SHALL REMOVE ALL WIRING AND CAP OFF CONDUITS.
- CONDUITS ON THIS WALL TO BE RECESSED BEHIND GWB OR REMOVED IF NOT USE.
- REFRIGERATED CASE TO BE REMOVED. COORDINATE REQUIREMENTS WITH THE REFRIGERATION CONTRACTOR. REFER TO E1.03 FOR ADDITIONAL INFORMATION.
- DELI/BAKERY EQUIPMENT TO BE RELOCATED. ELECTRICAL CONTRACTOR SHALL DISCONNECT AS REQUIRED. REMOVE DEVICES, WIRE, CONDUITS, ETC. AND EXTEND CIRCUITRY AND RECONNECT AS REQUIRED TO NEW LOCATION. REFER TO E4.01 FOR ADDITIONAL INFORMATION.
- ELECTRICAL CONTRACTOR SHALL DISCONNECT CHECK STAND AND ASSOCIATED EQUIPMENT. ELECTRICAL CONTRACTOR SHALL PULL ALL POINT OF SALE EQUIPMENT, FOOD LION ELECTRICAL CONTRACTOR (VIRGINIA) SHALL REMOVE AND DISPOSE OF CHECK STANDS. CIRCUITRY TO REMAIN FOR REUSE.
- MILLWORK TO BE REMOVED. ELECTRICAL CONTRACTOR SHALL DISCONNECT AND REMOVE ANY EXISTING DEVICES, PC, MONITORS, PRINTERS, ETC. AS REQUIRED. CIRCUITRY TO REMAIN FOR RECONNECTION. FIELD VERIFY EXISTING CONDITIONS AND EXTENT OF WORK. COORDINATE OVERNIGHT WORK WITH FOOD LION CONSTRUCTION SUPERVISOR 2 WEEKS PRIOR.
- EVAP COIL TO BE REPLACED. DISCONNECT AS REQUIRED. CIRCUITS TO REMAIN FOR REUSE. COORDINATE WITH THE REFRIGERATION CONTRACTOR.
- MECHANICAL EQUIPMENT TO BE REPLACED. DISCONNECT AND DRESS WIRES FOR CONNECTION OF REPLACEMENT EQUIPMENT. REFER TO SHEET E1.02 FOR MORE INFO.
- REMOVE CEILING-MOUNTED RECEPTACLES U.O.N.EQUIPMENT TO BE REMOVED & RECEPTACLE REUSED AS CONVENIENCE OUTLET; COORDINATE WITH SHEET E1.02 & E6.01.
- PANEL F AND POS IN OFFICE TO BE REMOVED. ALL CIRCUITS TO REMAIN ARE TO BE RELOCATED TO NEW PANELS "OW" & "CR" REMOVE FEEDER AND CONDUIT BACK TO SOURCE. REFER TO E4.01 AND E6.04 FOR ADDITIONAL INFORMATION.
- PROPANE EXCHANGE TO BE RELOCATED. ELECTRICAL CONTRACTOR SHALL FIELD VERIFY THAT ALL ELECTRICAL CONNECTIONS ARE CAPPED OFF WITHIN 5' OF THE FINAL LOCATION OF THE RELOCATED PROPANE EXCHANGES. ELECTRICAL CONTRACTOR SHALL REMOVE ALL WIRING AND CAP OFF CONDUITS.

**ATM NOTE:**  
ELECTRICAL CONTRACTOR SHALL NOT UNPLUG ATM FOR ANY REASON. NO ONE IS ALLOWED TO USE THE ELECTRICAL OUTLET OR PHONE LINE JACK FOR ANY REASON. IT IS ILLEGAL TO ATTACH ANY DEVICE TO THE ATM LINE FOR ANY REASON. THE ONLY PEOPLE ALLOWED TO UNPLUG THE ATM ARE NATIONWIDE SERVICE AND THE COMPANY THAT REPLENISHES CASH IN THE ATM. COORDINATE ANY AND ALL WORK ASSOCIATED WITH THE ATM WITH FOOD LION CONSTRUCTION SUPERVISOR AND NATIONWIDE SERVICE AND/OR THE COMPANY THAT REPLENISHES CASH.

**LEGEND**

----- ITEMS TO BE REMOVED AS NOTED ON PLAN

----- ITEMS TO BE RELOCATED

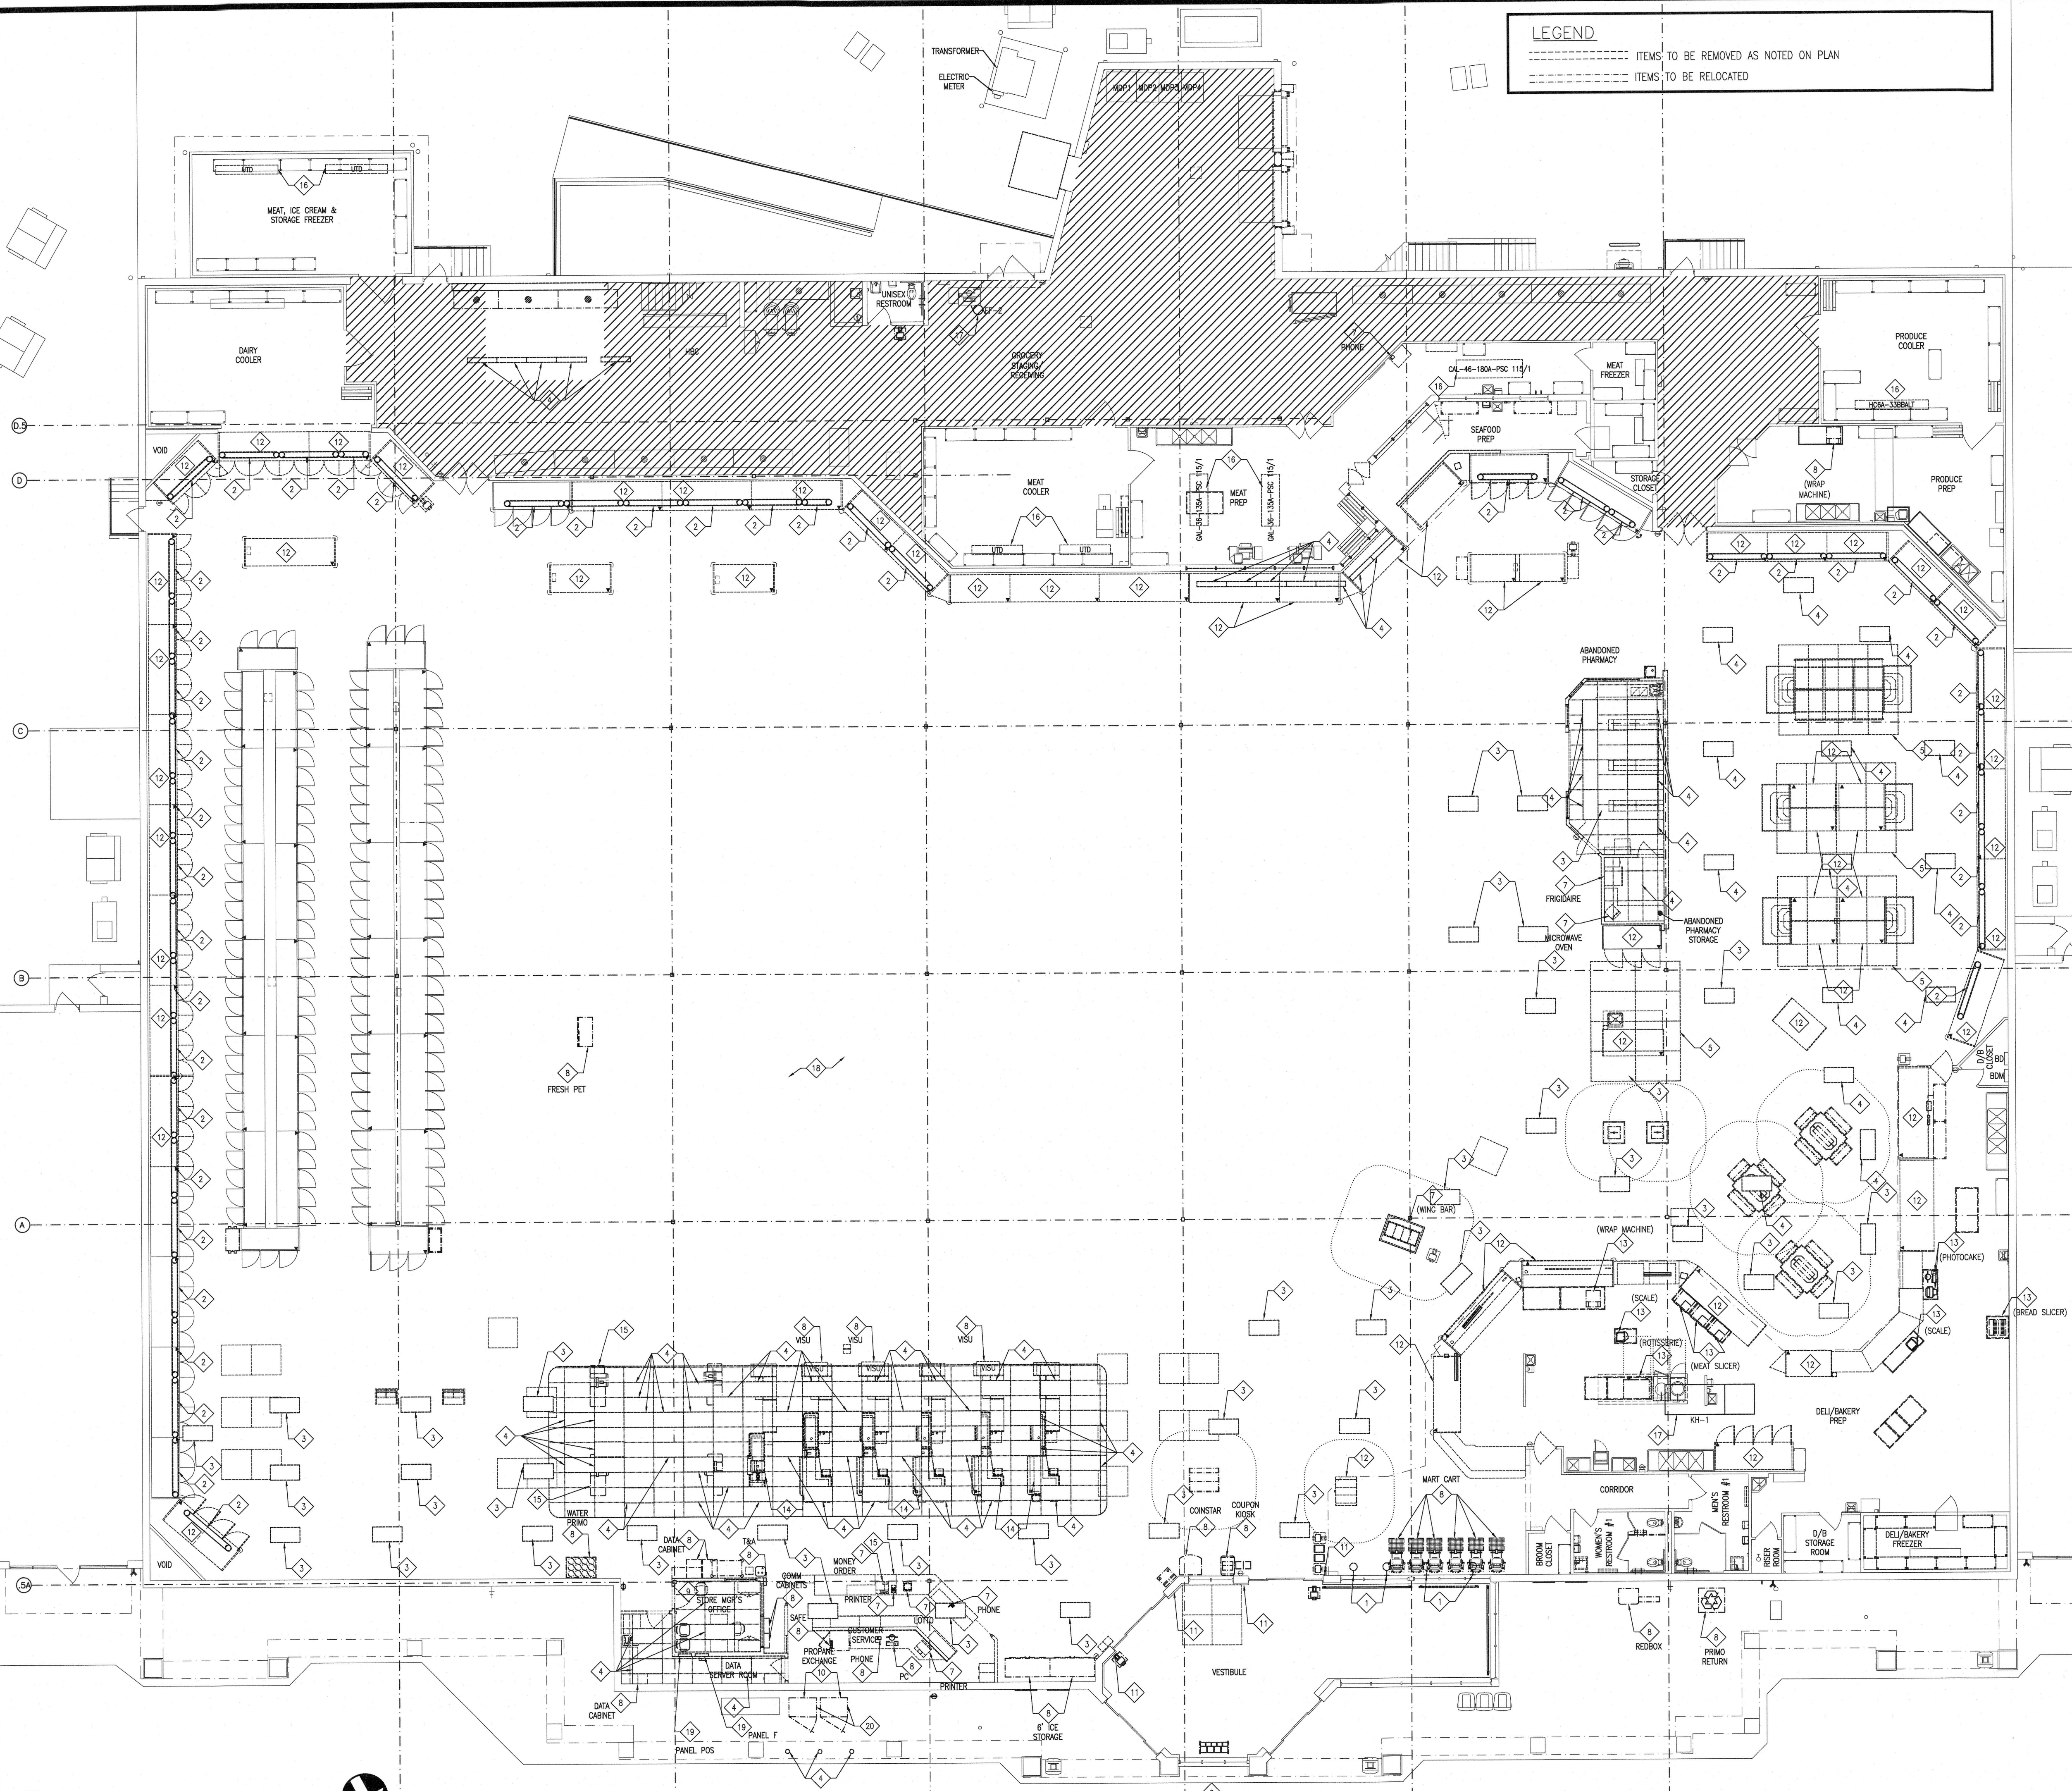

**1 ELECTRICAL DEMOLITION PLAN**  
E0.01 SCALE: 3/32" = 1'-0"

