


Friday, September 20, 2024 11:25:09 AM C:\2024\2654\00_Food Lion\2654.dwg Food Lion\2654.dwg User: jacob.mountain NC\jacob.mountain\jacob.mountain\2654.dwg

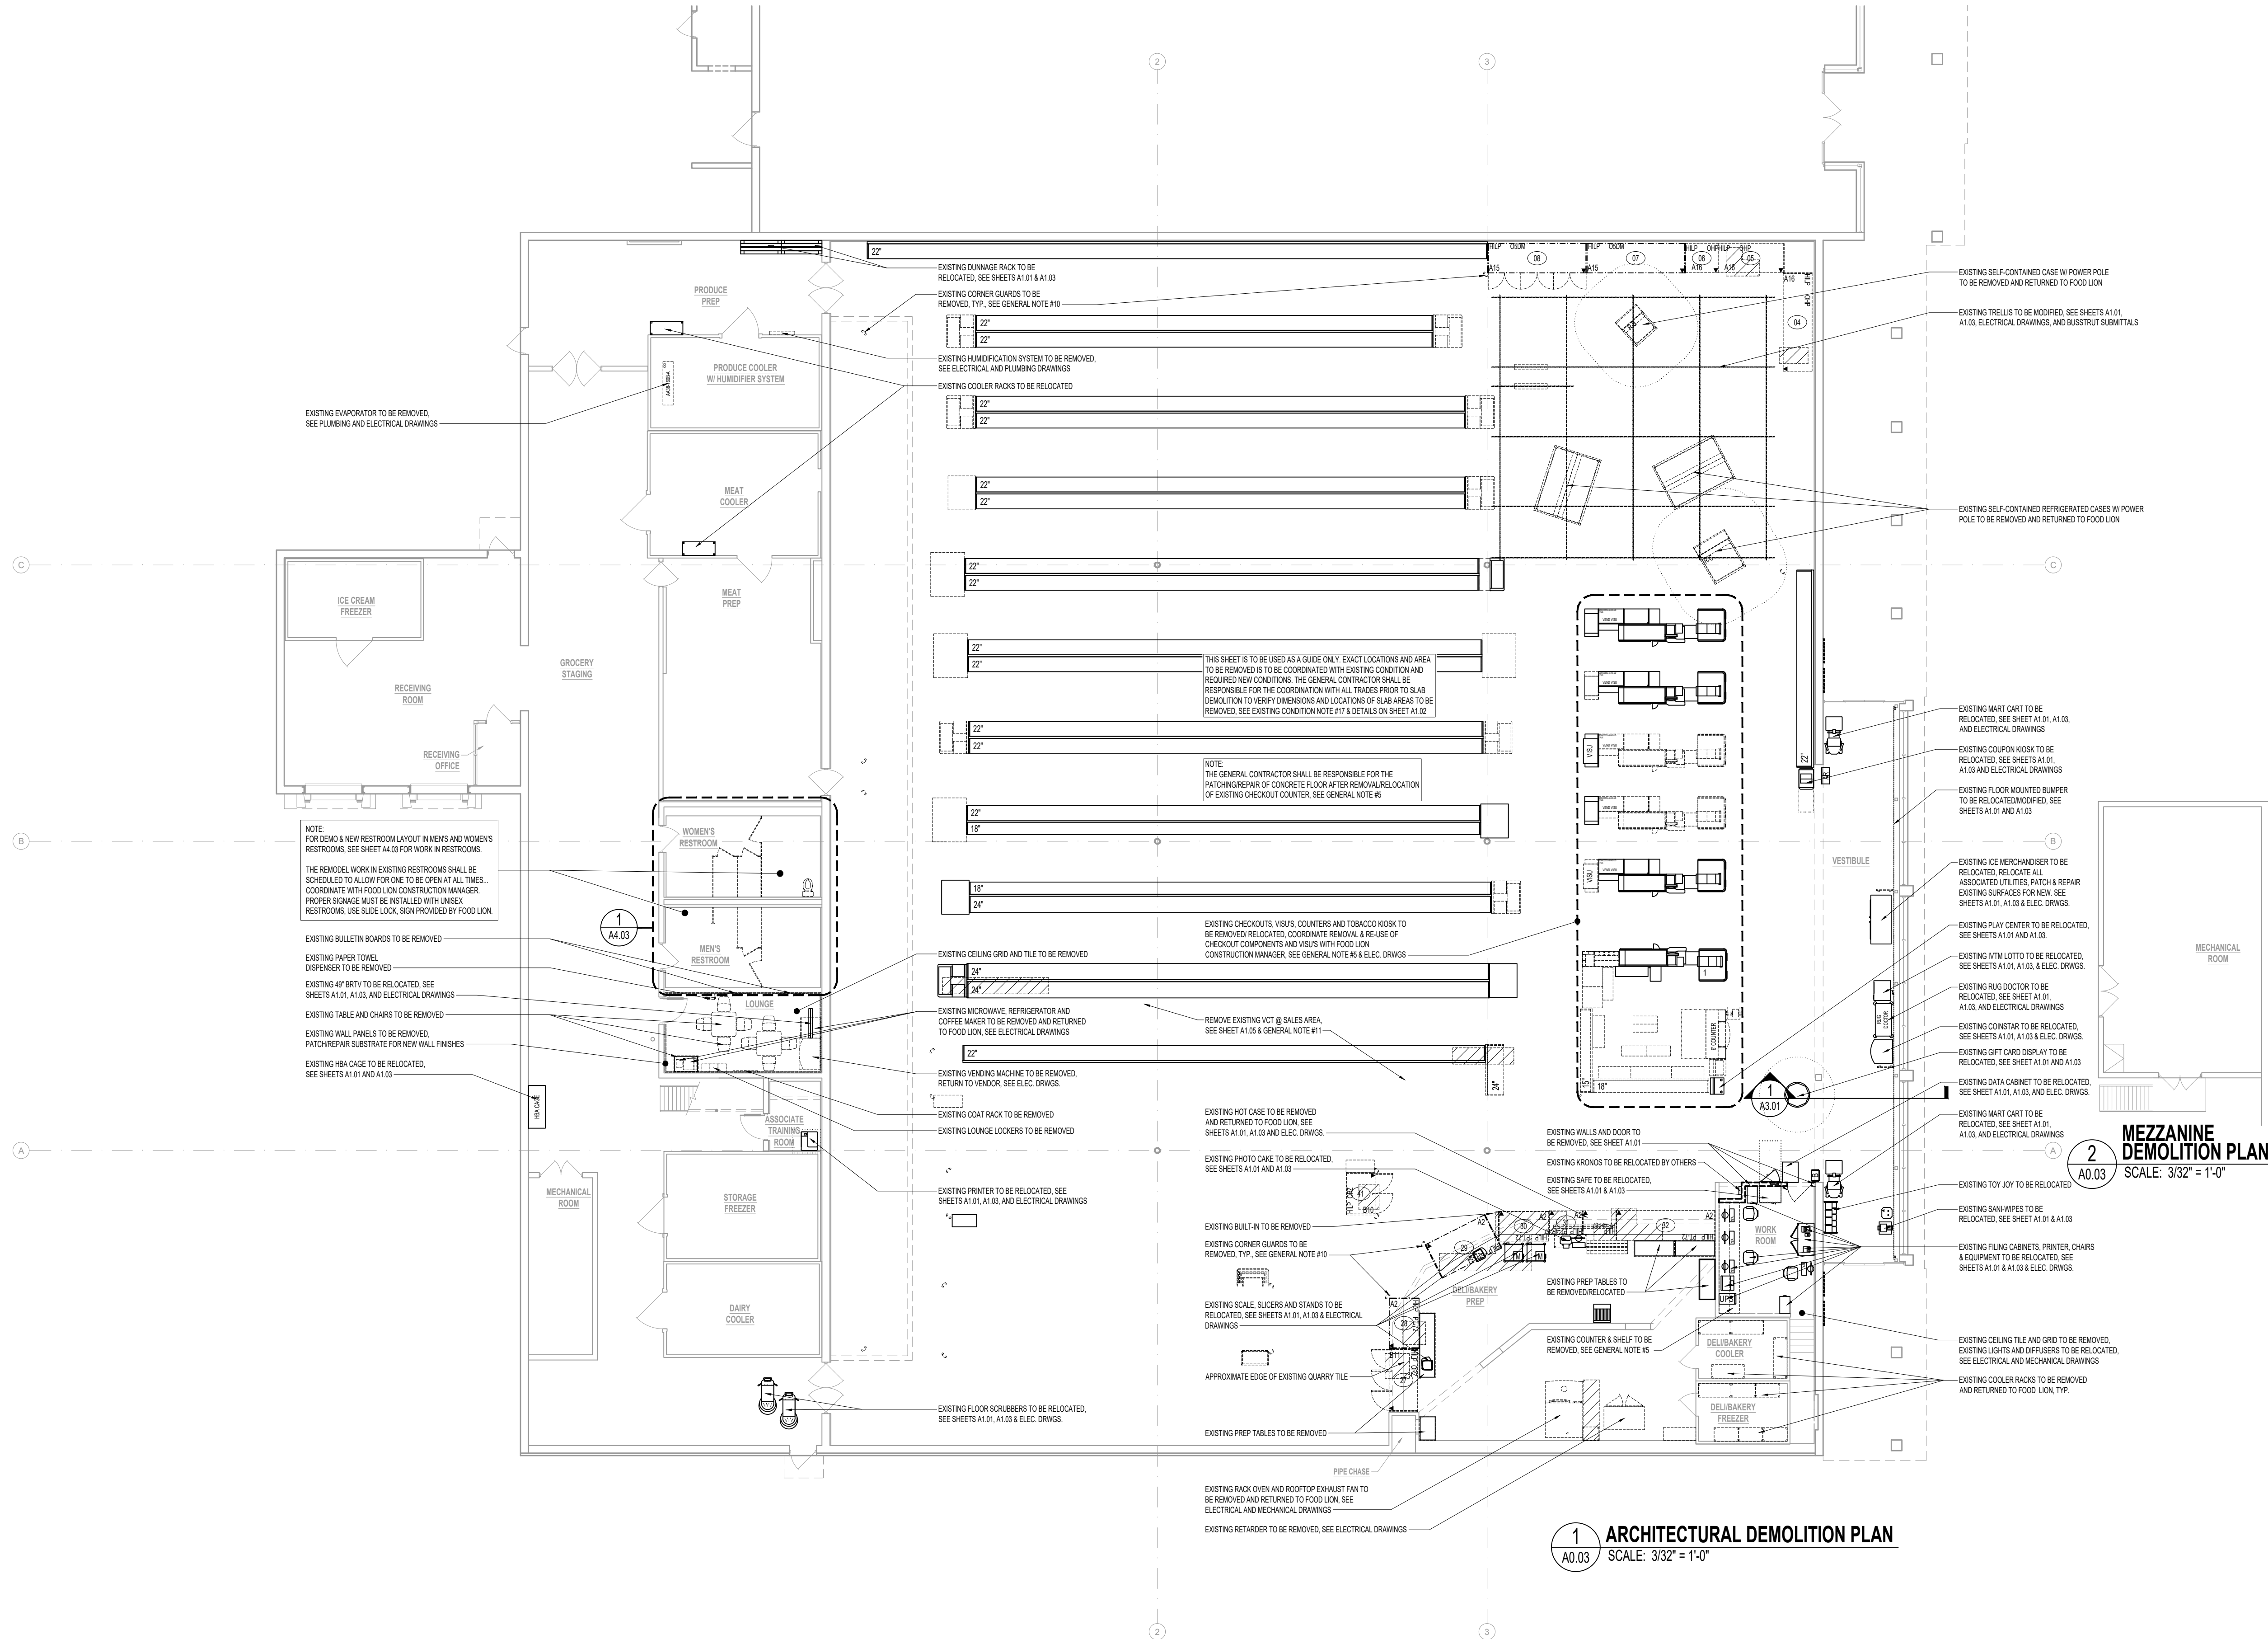

GENERAL NOTES:

- ALL CONTRACTORS MUST COMPLY WITH ALL STATE AND LOCAL CODES.
- THE GENERAL CONTRACTOR SHALL COORDINATE THE REMOVAL AND RELOCATION OF COOLER AND FREEZER COMPONENTS WITH COOLER/FREEZER MANUFACTURER FIELD PERSONNEL, AND W/ FOOD LION CONSTRUCTION MANAGER.
- FOR NEW DEPRESSED SLAB LOCATIONS AND DIMENSIONS, IF APPLICABLE, SEE SHEET A1.02.
- CONTRACTOR SHALL VERIFY LOCATION OF ALL UTILITIES AND RELOCATE UTILITIES AS NEEDED. ALL RELOCATION OF UTILITIES SHALL BE COORDINATED WITH THE FOOD LION CONSTRUCTION MANAGER AND/OR LOCAL UTILITIES.
- GENERAL CONTRACTOR SHALL PATCH AND REPAIR FLOOR, CEILING, ADJOINING WALLS AND OPENINGS WHERE WALLS, DOORS & FRAMES AND EQUIPMENT HAVE BEEN REMOVED. WORK WILL BE DONE IN A PROFESSIONAL MANNER WITH MATCHING MATERIALS.
- GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING ALL ROOF OPENINGS/PENETRATIONS CAUSED BY STRUCTURAL, PLUMBING, ELECTRICAL, MECHANICAL AND REFRIGERATION MATERIALS OR EQUIPMENT. COORDINATE REPAIRS WITH LANDLORD ROOFING CONTRACTOR (NOT TO VOID CURRENT WARRANTY).
- GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING AND CAPPING ALL ELECTRICAL STUB-UPS, DRAINS AND PITS THAT CANNOT BE REUSED. PATCH AND REPAIR FLOOR AS NEEDED.
- GENERAL CONTRACTOR SHALL COORDINATE ALL DEMOLITION, EXPANSION, REMOVAL AND REMOVAL OF MATERIALS, ETC. OF THE FRONT BUILDING ELEVATION WITH SHEET A2.01 AND FOOD LION CONSTRUCTION MANAGER.
- CONTRACTOR TO REMOVE ALL EXISTING DECOR UNLESS NOTED TO REMAIN AND REPAIR DRYWALL AS NEEDED. COORDINATE WITH SHEETS A2.02 AND A6.01. COORDINATE WITH DECOR PLANS.
- GENERAL CONTRACTOR SHALL REMOVE ALL CORNER GUARDS AT REFRIGERATED CASES AS NOTED ON PLAN AND REPAIR FLOOR AS DIRECTED BY FOOD LION CONSTRUCTION MANAGER.
- GENERAL CONTRACTOR TO REMOVE VINYL TILE/CARPET FROM SPECIFIED FLOORS AND GRIND CONCRETE FLAT, SMOOTH AND FREE OF MASTIC. PREPARE TO SHEET A1.05 AND CURRENT ASBESTOS SURVEY.
- THE ELECTRICAL CONTRACTOR SHALL REMOVE THE EXISTING PARCEL PICK-UP BELL AND ITS RELATED EQUIPMENT AS REQUIRED. PATCH AND REPAIR ALL FINISHES, IF APPLICABLE.
- GENERAL CONTRACTOR SHALL COORDINATE THE REMOVAL OF EXTERIOR WINDOWS, WALLS, & DOORS WITH THE FOOD LION CONSTRUCTION MANAGER IN ORDER TO MAINTAIN STORE SECURITY & SAFE BUILDING.
- THE GENERAL CONTRACTOR SHALL COORDINATE THE REMOVAL OF ALL H.V.A.C. EQUIPMENT AND ANY APPLICABLE CEILING TILE/GRID WITH THE MECHANICAL CONTRACTOR.
- PLUMBING CONTRACTOR AND GENERAL CONTRACTOR SHALL COORDINATE THE REMOVAL OF PLUMBING FIXTURES WITH THE FOOD LION CONSTRUCTION MANAGER. PLUMBING DEMOLITION WILL NOT BE ALLOWED UNTIL THE COORDINATION MEETING IS CONDUCTED.
- THE GENERAL CONTRACTOR SHALL REMOVE ANY EXISTING WOOD BASEBOARD THAT IS ATTACHED TO MASONRY WALLS. PATCH ALL WALLS WHERE NEEDED AND CAULK THE JOINT WHERE WALL ADJOINS FLOOR.
- THE EXISTING CONDITIONS ON THIS SHEET ARE INTENDED TO CONVEY THE APPROXIMATE CONDITION OF THE BUILDING. ALL DATA SHALL BE VERIFIED BY THE GENERAL CONTRACTOR PRIOR TO SUBMISSION OF BIDS AND/OR THE COMMENCEMENT OF WORK. ANY CONDITIONS WHICH DIFFER SUBSTANTIALLY FROM THAT INDICATED ON THE EXISTING FUTURE PLAN OR IN THE CONSTRUCTION DOCUMENTS, SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE FOOD LION CONSTRUCTION MANAGER/ENGINEERING DEPARTMENT.
- THE DEMOLITION PLAN IDENTIFIES GENERAL ANTI-VIBRATION TO BE DEMOLISHED ONLY AND IS NOT INTENDED TO ILLUSTRATE EACH AND EVERY ITEM REQUIRING DEMOLITION. THE GENERAL CONTRACTOR SHALL FAMILIARIZE HIMSELF WITH ALL EXISTING CONDITIONS IN ORDER TO ASCERTAIN THE FULL EXTENT OF DEMOLITION TO BE PERFORMED. CLOSE COORDINATION WITH THE FOOD LION CONSTRUCTION MANAGER IS CRITICAL DURING ALL PHASES OF DEMOLITION AND CONSTRUCTION.
- THE GENERAL CONTRACTOR SHALL MAINTAIN ALL UTILITIES AND SERVICES TO EXISTING TENANT SPACES (VACANT OR OCCUPIED) DURING DEMOLITION AND CONSTRUCTION. UTILITIES AND SERVICES SHALL INCLUDE, BUT NOT BE LIMITED TO, ELECTRICAL, PLUMBING, GAS, WATER, FIRE, SPRINKLER, FIRE ALARM SYSTEMS, ETC. ANY SCHEDULED INTERRUPTION OF SERVICES REQUIRED DURING DEMOLITION OR CONSTRUCTION SHALL BE COORDINATED WITH THE FOOD LION CONSTRUCTION MANAGER AND TENANTS AT LEAST SEVEN (7) DAYS PRIOR TO THE INTERRUPTION.
- THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR ENSURING THAT ALL SUBCONTRACTORS PLACE ALL CONSTRUCTION DEBRIS DIRECTLY INTO DUMPSTERS OR CURB TRUCKS FOR REMOVAL. USE OF THE STORE DUMPSTER IS NOT ALLOWED. NO CONSTRUCTION DEBRIS WILL BE ALLOWED INSIDE THE STORE OR IN SIGHT OF THE CUSTOMER.
- THE GENERAL CONTRACTOR MUST COORDINATE WITH THE CONSTRUCTION MANAGER AND THE STORE MANAGER ON THE NIGHT OF FRONT END CHANGE OUT TO INSURE THERE IS ADEQUATE ROOM TO UNLOAD THE FRONT END EQUIPMENT IN THE STORE. IF SPACE IS LIMITED, THE GENERAL CONTRACTOR WILL BE REQUIRED TO PROVIDE A STORAGE TRAILER ON SITE. THE GENERAL CONTRACTOR MUST PROVIDE A FORKLIFT FOR THE FRONT END EQUIPMENT REMOVAL.
- THE GENERAL CONTRACTOR WILL BE RESPONSIBLE FOR ALL "ALL" DUMPSTERS DUMPS INCLUDING THOSE FOR THE REFRIGERATION CONTRACTOR AND GROCERY RESET. THE REFRIGERATION CONTRACTOR WILL BE RESPONSIBLE FOR BREAKING EVERYTHING DOWN BEFORE PUTTING IN THE DUMPSTER. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR THE DISPOSAL OF REMOVED GONDOLAS AND SHELVING. ONCE THE GROCERY SET TEAM PALLETIZE THE SHELVING AND LOCATED TO THE DOCK. ALL STORES REQUIRE A GROCERY RESET. MAKE SURE THIS IS ACCOUNTED FOR. GROCERY RESET MAY BE COMPLETED PRIOR TO START OF CONSTRUCTION. IF THIS OCCURS, FOOD LION CORPORATE PROVIDES DUMPSTERS.
- THE GENERAL CONTRACTOR MUST HAVE PROFESSIONAL SIGNAGE AND NEATLY INSTALLED ORANGE FENCING FOR ANY DETOURS REQUIRED DURING THE COURSE OF THE REMODEL. USE PLYWOOD DUST SCREENS WITH TYVEK (LETTERING TURNED INWARD) AROUND PREP AREAS... ETC. DUST SCREENS SHOULD BE BUILT WHEN ANY JACK HAMMERING, SAWING, DEMOLITIONS, ETC. IS TAKING PLACE INSIDE THE STORE. ALL JACK-HAMMERING SHALL BE DONE AFTER OPERATING HOURS. DUST SCREENS NEED TO BE STRUCTURAL AND INSULATED WHERE APPROPRIATE. TURN OFF HVAC WHEN HEAVY DEMOLITION OR EXCESSIVE DUST IS BEING CREATED. FOOD LION GROCERY CARTS OR WET SIGNS ARE NOT ALLOWED TO BE USED AS FENCING SUPPORTS.
- ELECTRICAL CONTRACTOR SHALL NOT UNPLUG ATM FOR ANY REASON. NO ONE IS ALLOWED TO USE THE ELECTRICAL OUTLET OR PHONE LINE JACK FOR ANY REASON. IT IS ILLEGAL TO UNPLUG THE ATM LINE FOR ANY REASON. THE ONLY PEOPLE ALLOWED TO UNPLUG THE ATM ARE NATIONWIDE SERVICE AND THE COMPANY THAT REPLENISHES CASH IN THE ATM. COORDINATE ANY AND ALL WORK ASSOCIATED WITH THE ATM WITH FOOD LION CONSTRUCTION MANAGER AND NATIONWIDE SERVICE AND/OR THE COMPANY THAT REPLENISHES CASH.

SLAB WORK

25. FLOOR CUTTING IS APPROXIMATE. WORK TO BE COORDINATED WITH THE FOOD LION CONSTRUCTION MANAGER AND APPROPRIATE TRADE. FLOOR SLAB CUTS SHALL BE 1/4" TO 1/2" THICKNESS. SMALL, SHARP CORNER EDGES OF FLOOR SLAB TO REMAIN AND RISK CRACKING. SQUARE OFF CUTS WHERE POSSIBLE. COORDINATE WITH THE APPROPRIATE TRADES.

26. COORDINATE ALL FLOOR CUTS WITH A1.01, P1.01 & P1.02.

TRENCH WORK

27. ALL TRENCHES SHALL BE REMOVED FROM THE STORE AND IT SHOULD NEVER HIT THE FLOOR. TRENCHES SHALL BE BACKFILLED WITH AGGREGATE NO LARGER THAN #57 DOWELS IN CONCRETE AND PROPER VAPOR BARRIER. OPEN TRENCHES ARE TO BE COVERED WITH 1/4" MIN. METAL PLATE AND MATCHING CARPET MATS AND DUST TAPED TO THE FLOOR DURING OPERATING HOURS. ALL PITS SHOULD BE PHOTOGRAPHED WITH CURRENT DATE TO SHOW INTERIOR BEFORE AND AFTER VAPOR BARRIER INSTALL, AND TRENCH COMPLETION AND SEND TO CONSTRUCTION MANAGER.

MEZZANINE DEMOLITION PLAN

2
A0.03
SCALE: 3/32" = 1'-0"

**1
A0.03
SCALE: 3/32" = 1'-0"**

ARCHITECTURAL DEMOLITION PLAN

REFRIGERATED CASE LEGEND

#	MFG	MODEL	SIZE	DESCRIPTION	INT	EXT	AGE
04	HLP	CHP	12'-0"	PRODUCE SINGLE-DECK	BLK	BGE	06
05	HLP	CHP	8'-0"	PRODUCE SINGLE-DECK	BLK	BGE	06
06	HLP	CHP	4'-0"	PRODUCE SINGLE-DECK	BLK	BGE	16
27	HLP	CRZ	7'-0"	FROZEN BAKERY	BLK	BGE	07
30	HLP	PT-72	6'-1"	COLD DELI SELF-SERVE	BLK	BGE	16
31	HLP	PT-48-67	4'-3"	COLD DELI SELF-SERVE	BLK	BGE	16
32	HLP	PT-72	12'-1"	COLD DELI SELF-SERVE	BLK	BGE	16
41	HLP	CRZ	5'-0"	FROZEN BAKERY END CAP	WHT	BGE	07

EQUIPMENT

QTY	DESCRIPTION
1	RACK OVEN (DB)
1	PROOFER (DB)
10	COOLER RACK (DB) COOLER & FREEZER
1	DUNNAGE RACK (DB)
2	WIRE RACK (DB)
4	STAINLESS STEEL PREP TABLE (DB)
3	VISU COOLERS
2	CHECKOUTS
1	TOBACCO KIOSK
1	CONES & TOPPINGS DISPLAY
1	SNACKS DISPLAY
1	MIX & MATCH BEER DISPLAY
1	MICROWAVE (LOUNGE)
1	STAINLESS STEEL PREP TABLE (LOUNGE)
1	COFFEE MAKER (LOUNGE)
1	REFRIGERATOR (LOUNGE)
1	VENDING MACHINE (LOUNGE)
TBD	GONDOLA SHELVING
TBD	SHELVING
TBD	DISPLAY TABLES
TBD	ENDCAP SHELVING
30	DUCKS
5	VENDOR ENDCAPS


NOTE:

CONTRACTOR SHALL NOT UNPLUG ATM FOR ANY REASON. NO ONE IS ALLOWED TO USE THE ELECTRICAL OUTLET OR PHONE LINE JACK FOR ANY REASON. IT IS ILLEGAL TO ATTACH ANY DEVICE TO THE ATM LINE FOR ANY REASON. THE ONLY PEOPLE ALLOWED TO UNPLUG THE ATM ARE NATIONWIDE SERVICE AND THE COMPANY THAT REPLENISHES CASH IN THE ATM. COORDINATE ANY AND ALL WORK ASSOCIATED WITH THE ATM WITH FOOD LION CONSTRUCTION MANAGER AND NATIONWIDE SERVICE AND/OR THE COMPANY THAT REPLENISHES CASH. SECURE THE ATM SIGNAGE. DO NOT DESTROY.



7035 NORTHWINDS DR NW
CONCORD, NC 28027
704.700.2000 | ycharch.com

PROFESSIONAL SEALS:

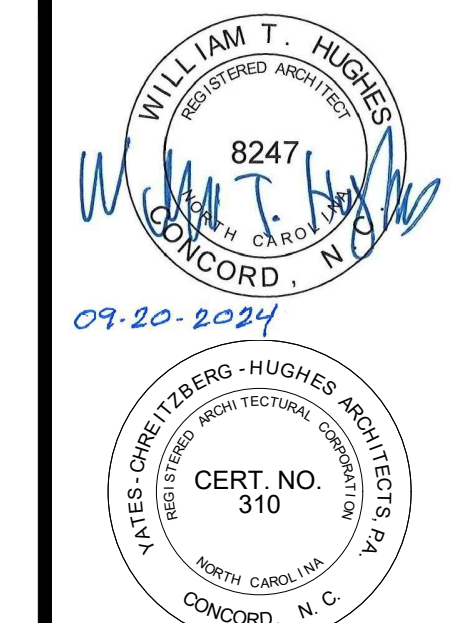

OWNERSHIP OF INSTRUMENTS OF SERVICE:
All reports, specifications, plans, computer files, field data, notes, and other documents and materials prepared or furnished by YCH Architects, Inc. shall remain the property of the Design Professional. The Design Professional shall retain the copyright in all drawings and other reserved rights, including the copyright thereto. This drawing is the property of YCH Architects and is not to be reproduced or copied in whole or in part. It is not to be used on any other project and is to be returned upon request.
© Copyright 2024

CONSULTANT:



FOOD LION
STORE NO. 2654
INTERIOR ALTERATIONS
610 East King Street | Kings Mountain, NC 28086

FL PROJECT NO.: 2654FLMHP24

FILE NAME: 2654 A0.03_00.dwg

YCHA COM. #: 22423.00

PHASE & DATE:
Construction Documents
09-20-2024

REVISIONS:

SHEET TITLE:
ARCHITECTURAL DEMOLITION PLAN

ARCHITECTURAL:

A0.03