NOTES:
- ELECTRICAL CONTRACTOR TO PROVIDE POWER AND CAT-5 COMMUNICATIONS CABLING TO ALL FRONT-END SERVICES UNLESS NOTED OTHERWISE.
- ALL CAT 5 CABLE SHALL BE BELDEN 1212 CMR CAT-5E 4 PAIR 24 AWG (BELDEN 1200 DATATWIST CABLE SERIES)
- ALL CAT 5 CABLE TO BE INSTALLED IN ¾" CONDUIT UNLESS NOTED OTHERWISE

ELECTRICAL WIRING KEY NOTES (X)

1. FRONT-END SET TEAM (FOOD LION VENDOR) SHALL PROVIDE POWER AND PULL (2) CAT-5 UNSHIELDED ETHERNET CABLES PER REGISTER (REGISTER, CPU, & CATALINA PRINTER) SEE A1.01. COIL 15'-0" OF EXTRA CABLE AT EACH END FOR CONNECTION BY OTHERS (MACRO).
2. CONDUITS ON THIS WALL TO BE RECESSED BEHIND GWB.
3. COORDINATE WITH FOOD LION CONSTRUCTION MANGER THE AMOUNT OF WORK REQUIRED FOR RELOCATION OF KRONOS.
4. COORDINATE WITH FOOD LION CONSTRUCTION MANGER THE AMOUNT OF WORK REQUIRED FOR MOTION DETECECTOR RELOCATED DUE TO NEW WALL.
5. COORDINATE WITH FOOD LION CONSTRUCTION MANGER THE AMOUNT OF WORK REQUIRED TO RELOCATE FIRE ALARM DEVICE.
6. COORDINATE WITH FOOD LION CONSTRUCTION MANGER THE AMOUNT OF WORK REQUIRED FOR RELOCATION OF MICROPHONE.
7. COORDINATE WITH FOOD LION CONSTRUCTION MANGER THE AMOUNT OF WORK REQUIRED FOR RELOCATION OF SECURITY CAMERA(S).

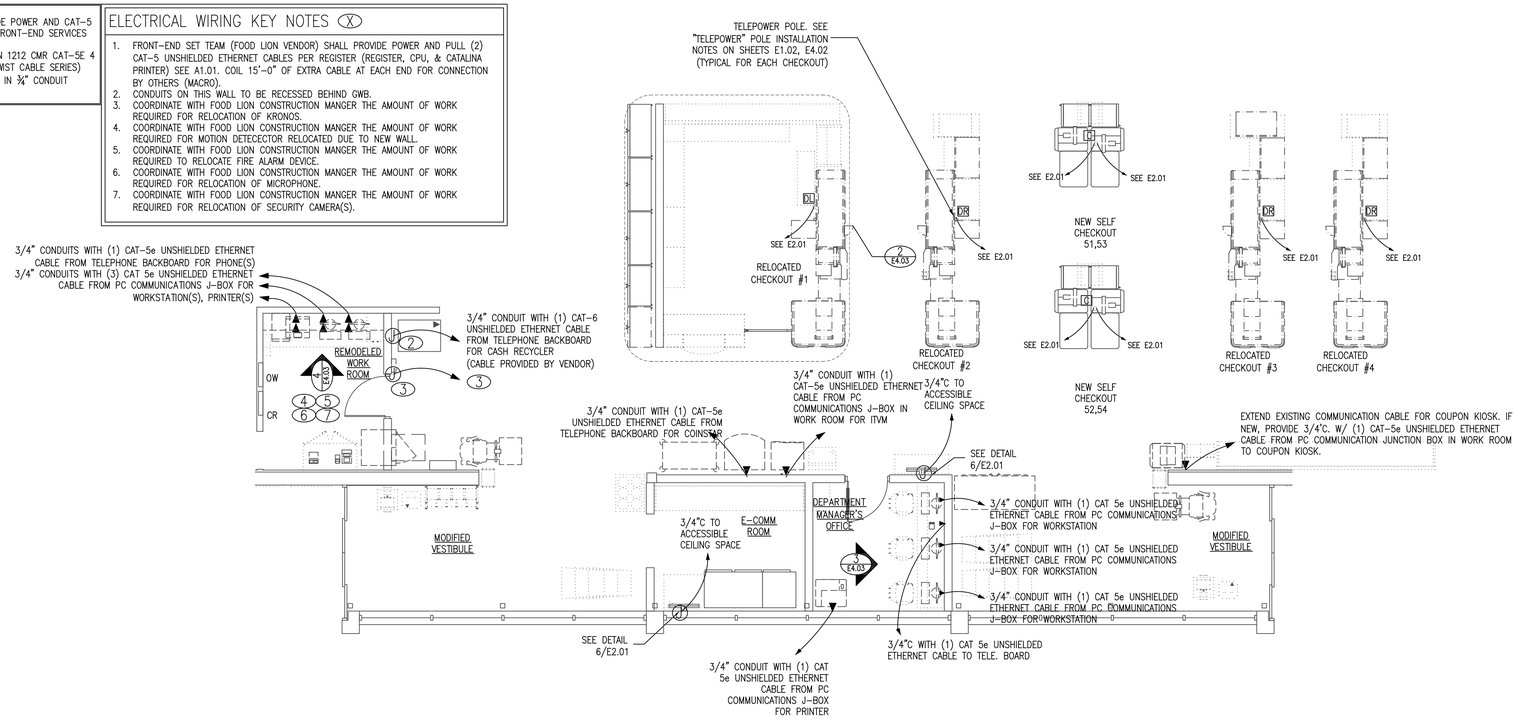

1 E4.03 ENLARGED COMMUNICATION WIRING PLAN
SCALE: 3/16" = 1'-0"

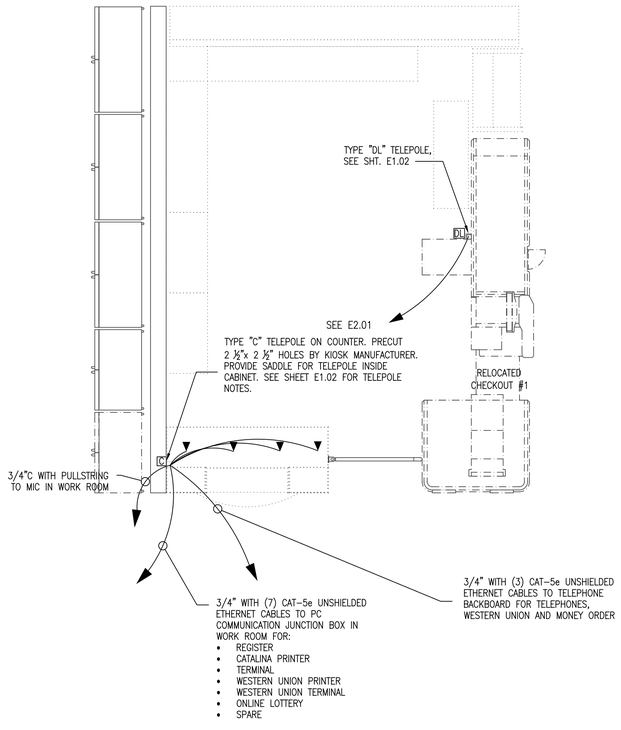

2 E4.03 CUSTOMER SERVICE KIOSK COMMUNICATIONS PLAN
SCALE : 1/2" = 1'-0"

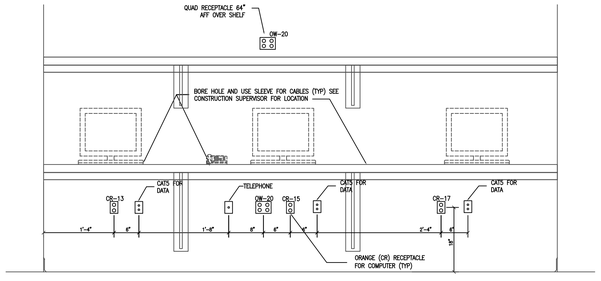

3 E4.03 DEPARTMENT MANAGERS COUNTER ELEVATION
SCALE : NOT TO SCALE



4 E4.03 WORK ROOM ELEVATION
SCALE : NOT TO SCALE

Wednesday, September 18, 2024 4:26:09 PM F:\2654 - Kings Mountain, NC (01865)\04 E\E4.03_00.dwg

YCH Architects
7035 NORTHWINDS DR NW
CONCORD, NC 28027
704.700.2000 I ycharch.com

PROFESSIONAL SEALS:
NORTH CAROLINA REGISTERED LANDSCAPE ARCHITECT SEAL 16871 ENGINEER RANDALL W. STURGILL
04/20/2024
YATES - ORMETZBERG - HUGHES ARCHITECTS P.A. REGISTERED ARCHITECTURAL CORPORATION NORTH CAROLINA CERT. NO. 310 CONCORD, N. C.

OWNERSHIP OF INSTRUMENTS OF SERVICE: All reports, specifications, plans, computer files, field data, notes, and other documents and instruments of service shall remain the property of the Design Professional. The Design Professional shall retain all common law, statutory and other reserved rights, including the copyright thereto. This drawing is the property of YCH Architects and is not to be reproduced or copied in whole or any part. It is not to be used on any other project and is to be returned upon request.
© Copyright 2024

CONSULTANT:
STURGILL ENGINEERING PA C-1210
ONE SOUTH MAIN ST. LEXINGTON, NC 27292
(336) 238-1249 PH.
(336) 236-6393 FAX

CLIENT:
2110 Executive Drive, Salisbury, NC 28145 Ph: 704.633.8250
FOOD LION

FOOD LION STORE NO. 2654 INTERIOR ALTERATIONS

610 East King Street I Kings Mountain, NC 28086

FL PROJECT NO.: 2654FLMHP24
FILE NAME: 2654 E4.03_00.dwg
YCHA COM. #: 22423.00
PHASE & DATE: Construction Documents 09-20-2024
REVISIONS:

SHEET TITLE: CUSTOMER SERVICE, WORKROOM, AND CHECKOUT COMMUNICATION PLAN
ARCHITECTURAL:
E4.03